

**IMMOBILE TILTING CONTAINERS WITH A COVER – SINGLE BOTTOM (TCSC TYPE)**

Application: for waste, chippings, products or other objects which need to be kept dry

It is impossible to release liquid from the container. The containers are suitable for protection of various types of material against moisture.

IMMOBILE TILTING CONTAINERS – SINGLE BOTTOM (TCS TYPE)

Application: for waste, chippings, products or other objects

It is impossible to release liquid from the container.

MOBILE TILTING CONTAINERS – SINGLE BOTTOM (TCM TYPE)

Application: for waste, chippings, products or other objects

The container is equipped with a set of Polyamid*** wheels (200mm diameter, 2 swiveling wheels with a brake and 2 fixed wheels). On customer's request the tilting containers may be equipped with wheels of higher loading capacity.


It is impossible to release liquid from the container.

MOBILE TILTING CONTAINERS – DOUBLE BOTTOM (TCM2C TYPE)

Application: for waste, chippings, products or other objects

The container is equipped with a set of Polyamid*** wheels (200mm diameter, 2 swiveling wheels with a brake and 2 fixed wheels). On customer's request the tilting containers may be equipped with wheels of higher loading capacity. This type of tilting container is suitable for transport of chippings which result from cutting with application of cooling liquid or for situations when a liquid needs to be separated from dry parts.

*** The Polyamid wheels are suitable for level surface

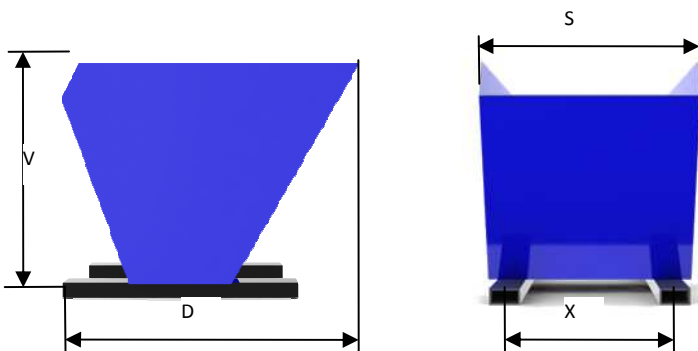

- D... Length
- S... Width
- L... Height
- X... The profile axis pitch for skid placing (800mm or 830mm)
The outside profile dimension for skid placing (180mm x 85mm)

Type	Container name	Length[mm]	Width[mm]	Height[mm]	Capacity [l]	Capacity [kg]
TCSC-800	Immobile tilting cont. covered, single bottom	1560	1070	1115	800	800
TCSC-1000	Immobile tilting cont. covered, single bottom	1560	1570	1115	1100	1000
TCS-600	Immobile tilting container, single bottom	1560	1070	850	600	800
TCS-900	Immobile tilting container, single bottom	1560	1570	850	900	1000
TCS-1200	Immobile tilting container, single bottom	2140	1070	1150	1200	1000
TCS-1700	Immobile tilting container, single bottom	2140	1570	1150	1700	1000
TCM-600	Mobile tilting container, single bottom	1560	1070	1070	600	800
TCM-900	Mobile tilting container, single bottom	1560	1570	1070	900	1000
TCM-1200	Mobile tilting container, single bottom	2140	1070	1360	1200	1000
TCM-1700	Mobile tilting container, single bottom	2140	1570	1360	1700	1000
TCM2C-600	Mobile tilting container, double bottom	1560	1070	1070	600	800
TCM2C-900	Mobile tilting container, double bottom	1560	1570	1070	900	1000